

## KSX 8.4 Pro


500Wh

SHIMANO  
STEPS

27,5 plus




FRAME	MOTOR	BATTERY	FORK	SUSPENSION	DERAILLEUR	SHIFTER	BRAKES	TYRES	WHEELS	SEAT POST	WEIGHT	SIZES
Full Alloy integrated 8.4 Pro	Shimano Steps 8000	Symplo 500 Wh integrated	RockShox Yari 160 mm RL	RockShox Deluxe RL 160 mm	Shimano XT 11sp M8000	Shimano SLX	Magura MT5 203-180mm	Kawasaki 27,5 plus 2.8	Kawasaki 27,5	Tranz X Telescopic RL	Kg 22.5	S (40) / M (42) L (46) / XL (50)

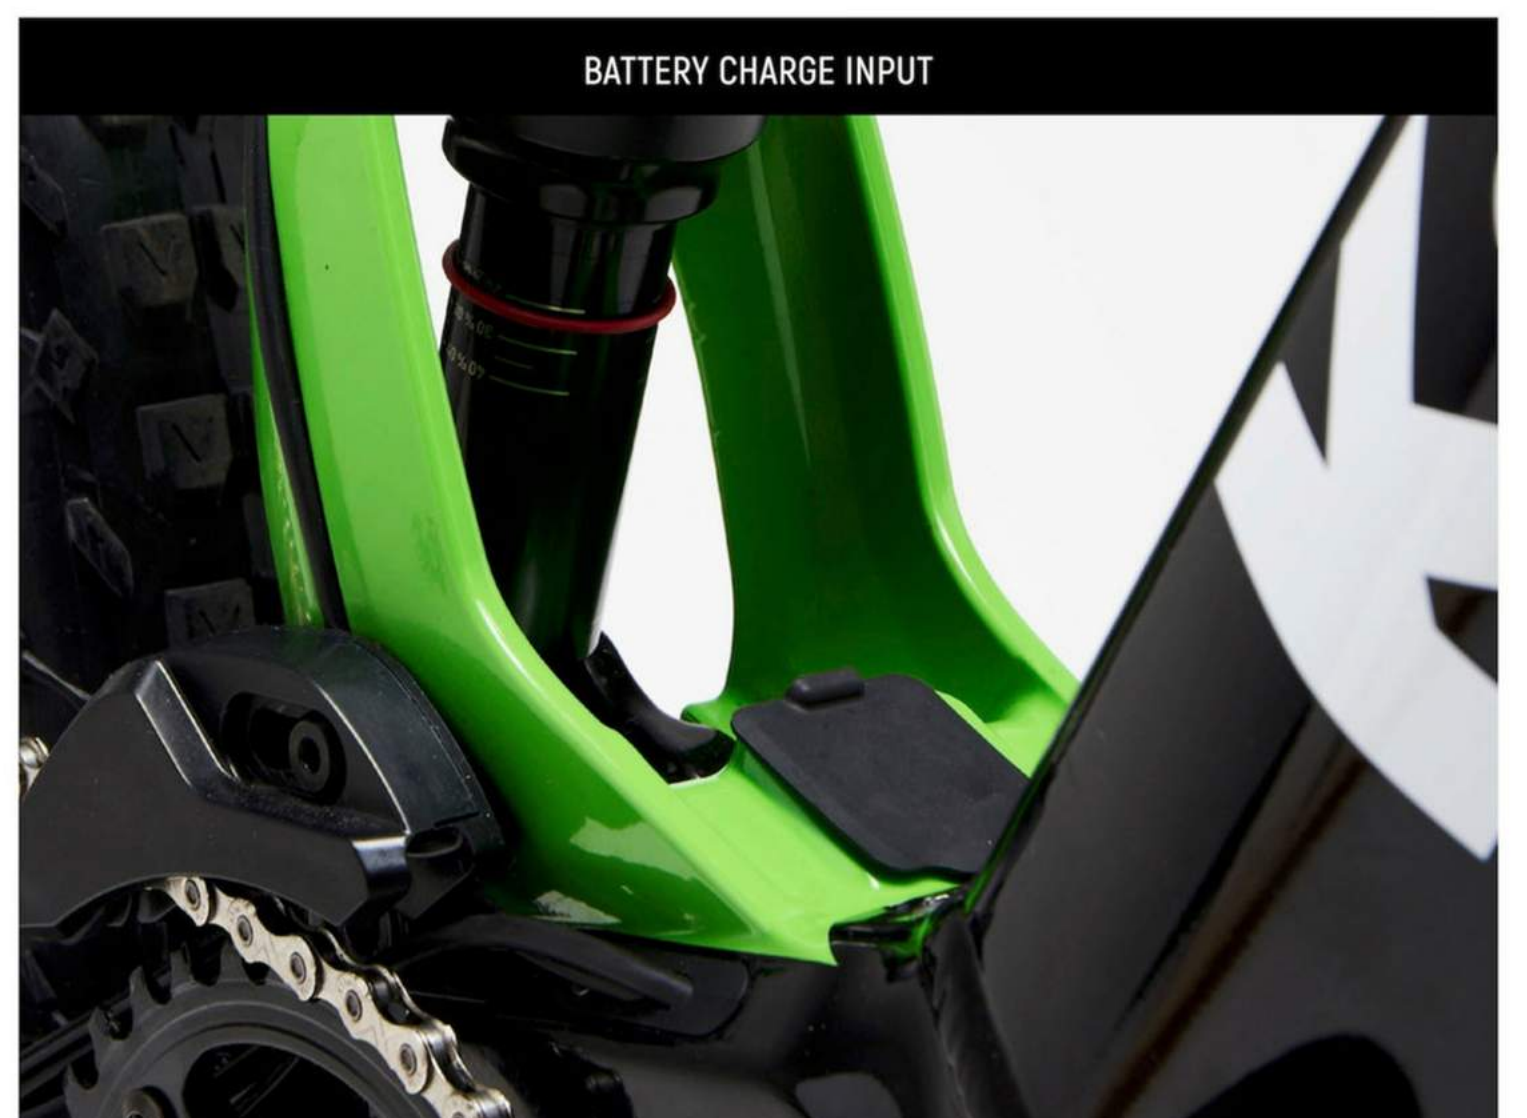

### SIZE DATA

GEOMETRY	S-40	M-42	L-46	XL-50
TT	598.6	618.6	641.1	663.5
FO	42	42	42	42
HTA	66.5	66.5	66.5	66.5
WB	1184.6	1204.6	1228.6	1252.6
STA	75	75	75	75
ST	400	420	460	500

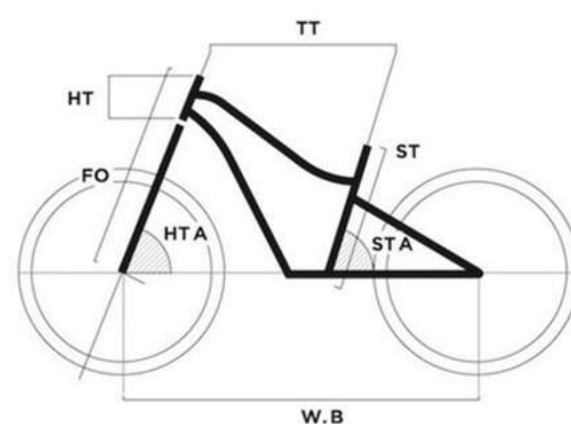

ST frame size = seat tube [mm] TT top tube [mm] HTA head tube angle [°] STA seat tube angle [°] FO fork length [mm] WB wheel base [mm]